

Model 2-120H/M01

Series 2000



Model 2-200H

Modern technology in a compact design

Series 2000 dispenser

New compact design

Stepper motor

Microprocessor

Function keys

Built in control panel

Aut. speed control

EME series 2000 dispensers are based on the latest technology and built into a compact design, that requires only little space.

The modern and advanced micro-processor control is integrated into the dispenser housing with no external connection cables, emphasizing the sensible and modern construction.

The stepper motor with micro step driver, gives accurate labelling, with an almost silent performance.

The operator keypad with its illuminated display, is an integral part of the dispenser and gives the operator easy access to all the smart functions and controls.

The internal memory allows storage of all settings for each type of label, reducing start up and change over time.

The intelligent processor with optional encoder, can vary the speed of the Series 2000, to follow the speed variations of products and packing machines.

Series 2000 dispensers are available in right or left hand versions and in 120 and 200mm label width.

Series 2000 options includes:

- Hot-foil coder.
- Remote mounted keypad.
- Tacho/Encoder control.
- Sensor for transparent labels.



Specifications and accessories:

Label web width, maximum:

Label web width, minimum:

Label length, maximum:

Label length, minimum:

Variable speed:

Number of labels per. minute:

Label roll diameter, maximum:

Label roll core, minimum:

Stepper motor with microstep:

Microprocessor with keyboard:

Illuminated display:

Password protection:

Internal memory capacity:

Model 2-120

120mm.

20mm.

250mm.

20mm.

0-25m/min.

300

Ø270mm.

40mm.

Yes

Yes

Yes

Yes

25

Model 2-200

200mm.

20mm.

250mm.

20mm.

0-25m/min.

300

Ø270mm.

40mm.

Yes

Yes

Yes

Yes

25

**EXT version
120mm/200mm**

0-35m/min.

400

45

Accessories for all models:

Separate remote keypad

Motorized label roll unwind

Microswitch for transparent labels

Moveable dispenser beak

Extra accessories for EXT models:

Tacho/Encoder function

Pre-warning for empty label roll

Signal for product separator

External interface signal I/O


Hot-foil coder

Specifications:

Can be used on dispenser Series 1000, 2000 and 4000.



Print area:
12x30/30x12mm.

2 types of brackets:
Right/Left model.

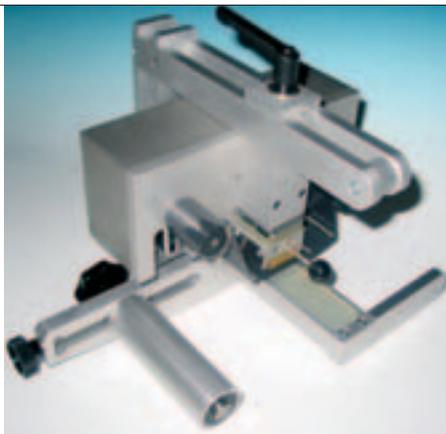


Optional separate keypad with display. It gives all the same control features as the built in keypad.

This allows remote mounting of the control unit for easy operation, within 5 meters from the dispenser.

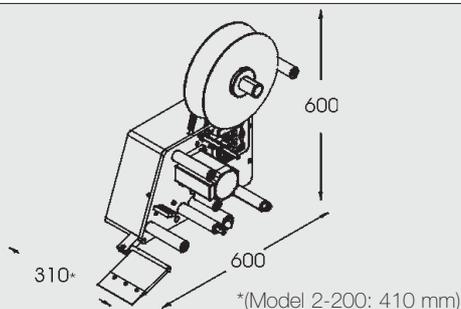

Model 2-120 Left



Model 2-120 Right

Power:

230VAC 50/60 Hz.

Consumption: 250 W

Weight:

Model 2-120: 16 Kg.

Model 2-200: 18 kg.

Distributor:



www.e-m-e.dk